


MANITOU 160ATJ



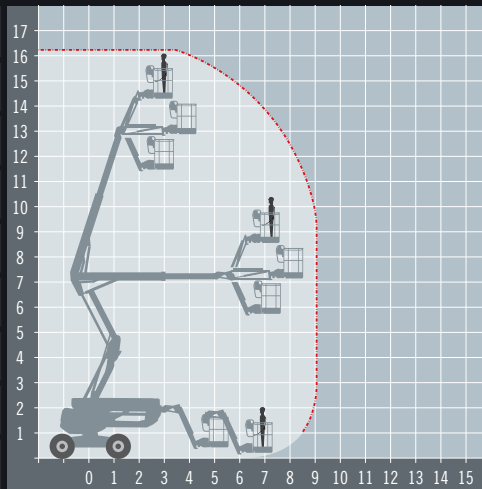

ALTERNATIVES: Nifty HR15RT, Genie Z45/25 RT

Articulated boom with all terrain capability

REACH HEIGHT	16.01 m
PLATFORM HEIGHT	14.01 m
UP AND OVER	7.38 m
HORIZONTAL REACH	8.3 m
STOWED HEIGHT	2.37 m
LENGTH X WIDTH*	6.53 x 2.3 m
PLATFORM SIZE	1.8 x 0.8 m
WEIGHT	6,160 kg
LIFT CAPACITY	230 kg









*Length and width shown are when stowed.

-  **DIESEL POWERED**
Perfect for external applications
-  **OUTDOOR RATED**
Wind rated for outdoor use
-  **ROUGH TERRAIN**
4 wheel drive for uneven ground
-  **IPAF 3b**
Requires IPAF category 3b

The Manitou 160 ATJ articulated platform is most suited to working outdoors on rough, uneven or sloping ground. With a load capacity of 230 kg, an up and over clearance of 7.38 metres and a working height of 16 metres the Manitou 160ATJ provides the operator with a large working envelope.

A range of extra's for 'Hire or Purchase' designed to give you the GTAdvantage™

-  **STOP NUISANCE BORROWING WITH GTA SECURE™**
-  **PROTECT SENSITIVE GROUND WITH 'GROUND GUARDS'**
-  **DOUBLE POINT HARNESSES TO KEEP YOU SAFE AT HEIGHT**
-  **PROTECT FINISHED SURFACES WITH WHEEL COVERS'**
-  **REFUEL ON-SITE THE EASY WAY WITH A FUEL BOX!**
-  **OPERATOR TRAINING FOR THIS ACCESS PLATFORM**

Find out more about the 'GTAdvantage' extras at gtaccess.co.uk



THE POWER IN ACCESS™