


JLG LIFTLUX 153-12

ALTERNATIVES: Dingli DL1612

Narrow, high level electric scissor lift

REACH HEIGHT	17.3 m
PLATFORM HEIGHT	15.3 m
STOWED HEIGHT*	2.65 m
LENGTH	4.12 m
WIDTH	1.22 m
PLATFORM SIZE	3.91 x 1.16 m
EXTENDED SIZE	5.4 x 1.16 m
WEIGHT	7,600 kg
LIFT CAPACITY	500 kg

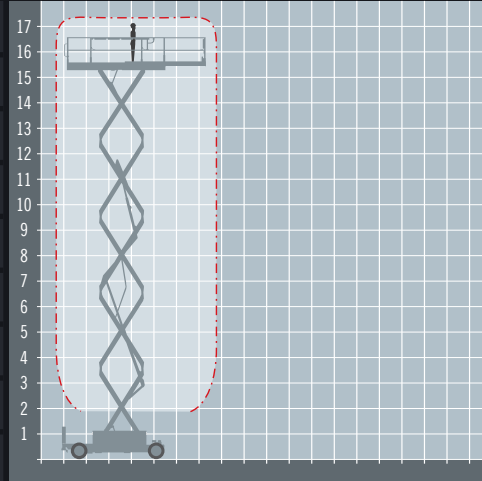

*Stowed height shown is with the handrails folded.


ELECTRIC POWERED
 Perfect for indoor applications


NON MARKING TYRES
 Prevents marking to finished floors


IPAF 3a
 Requires IPAF category 3a

The JLG Liftlux 153-12 electric scissor lift combines a narrow frame with front wheel drive and 'Steer Plus' large diameter wheels that provide superb mobility and performance. The JLG Liftlux 153-12 is perfect for warehouse high bay use due to its compact width and high platform height.

A range of extra's for 'Hire or Purchase' designed to give you the GTAdvantage™


STOP NUISANCE BORROWING WITH GTA SECURE™

OPERATOR TRAINING FOR THIS ACCESS PLATFORM

STAY FULLY CHARGED WITH TRANSFORMERS AND LEADS

REMOVE THE RISK WITH GTA ALL RISK COVER

Find out more about the 'GTAdvantage' extras at gtaccess.co.uk